

# E4 1-1/2" Plastic Bolted Pumps

## Specifications and Performance

### SPECIFICATIONS

E4

**FLOW RATE** (Adjustable)... 0-72 gpm (0-272 lpm)

**PORT SIZE**

Inlet and Outlet..... 1.50" ANSI/DIN Flanged

**AIR INLET** ..... 0.50" NPT

**AIR EXHAUST** ..... 0.75" NPT

**SUCTION LIFT** .... 15' Dry/25' Wet (4.57m/7.62m)

Teflon®..... 10' Dry/20' Wet (3.05m/6.09m)

**MAX. PARTICLE SIZE** (Dia.) ..... 0.1875" (4.76mm)

**SHIPPING WEIGHTS**

Polypropylene ..... 32 lbs (14.5 kg)


Kynar® ..... 45 lbs (20.4 kg)



### PERFORMANCE

Determined by actual flow meter tests.

E4

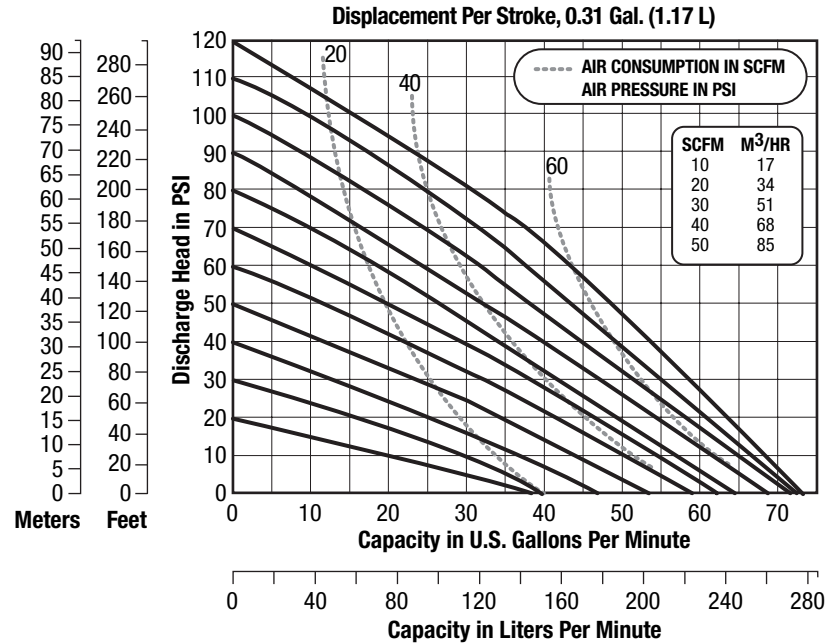

**CAUTION:** Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.  
Swivel Inlet/Discharge.

### DIMENSIONS

Consult factory for certified drawings.

E4

