


Unilift CC 5-A1 (240V,0.2kW,0.2-1.4L/sec,1-5m)





Contents:

Unilift CC 5 (96280972)	2
Quotation text	2
Quotation text incl. photo	3
Data sheet incl. curve	4
Pump curve	5
Dimensional drawing	6
Wiring diagram	7



Position	Qty.	Description	Single Price
	1	<p>Unilift CC 5 Product No.: 96280972</p> <p>Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level. The pumps are designed for pumping rainwater and grey wastewater, e.g. from</p> <ul style="list-style-type: none"> • washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level • cellars or buildings prone to flooding • draining wells • wells for surface water with inlets from roof gutters, pits, tunnels, etc. • swimming pools, ponds or fountains. <p>The pumps are suitable for both stationary and portable use. They are for automatic operation. The pumps allow free passage of particles up to ø10 mm.</p> <p>The motor incorporates automatic overload protection cutting out the motor in case of overload. When cooled to normal temperature, the motor restarts automatically.</p> <p>Technical: Maximum particle size: 10 mm Curve tolerance: ISO 9906 Annex A</p> <p>Materials: Pump housing: PP 15 GF Impeller: PPOm 20 GF</p> <p>Installation: Pump outlet: G 1 1/4 Maximum installation depth: 10 m</p> <p>Liquid: Liquid temperature range: 0 .. 40 °C</p> <p>Electrical data: Mains frequency: 50 Hz Rated voltage: 1 x 220-240 V Rated current: 0.98 A Capacitor size - run: 4 µF/450 V Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): B Length of cable: 10M m Type of cable plug: AUS</p> <p>Others: Net weight: 4.35 kg Gross weight: 5 kg Shipping volume: 0.017 m³</p>	Price on request

Position	Qty.	Description	Single Price																																				
	1	<p data-bbox="296 163 432 192">Unilift CC 5</p> <div data-bbox="296 192 678 618" style="border: 1px solid black; padding: 5px;">  </div> <p data-bbox="683 589 1219 618">Note! Product picture may differ from actual product</p> <p data-bbox="296 645 549 674">Product No.: 96280972</p> <p data-bbox="296 701 1251 757">Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.</p> <p data-bbox="296 757 1147 786">The pumps are designed for pumping rainwater and grey wastewater, e.g. from</p> <ul data-bbox="296 786 1244 929" style="list-style-type: none"> • washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level • cellars or buildings prone to flooding • draining wells • wells for surface water with inlets from roof gutters, pits, tunnels, etc. • swimming pools, ponds or fountains. <p data-bbox="296 956 948 985">The pumps are suitable for both stationary and portable use.</p> <p data-bbox="296 985 655 1014">They are for automatic operation.</p> <p data-bbox="296 1014 916 1043">The pumps allow free passage of particles up to ø10 mm.</p> <p data-bbox="296 1070 1216 1126">The motor incorporates automatic overload protection cutting out the motor in case of overload.</p> <p data-bbox="296 1126 1046 1155">When cooled to normal temperature, the motor restarts automatically.</p> <p data-bbox="296 1182 419 1211">Technical:</p> <table data-bbox="296 1211 863 1272"> <tr> <td>Maximum particle size:</td> <td>10 mm</td> </tr> <tr> <td>Curve tolerance:</td> <td>ISO 9906 Annex A</td> </tr> </table> <p data-bbox="296 1299 413 1328">Materials:</p> <table data-bbox="296 1328 807 1388"> <tr> <td>Pump housing:</td> <td>PP 15 GF</td> </tr> <tr> <td>Impeller:</td> <td>PPOm 20 GF</td> </tr> </table> <p data-bbox="296 1415 435 1444">Installation:</p> <table data-bbox="296 1444 743 1505"> <tr> <td>Pump outlet:</td> <td>G 1 1/4</td> </tr> <tr> <td>Maximum installation depth:</td> <td>10 m</td> </tr> </table> <p data-bbox="296 1532 379 1561">Liquid:</p> <table data-bbox="296 1561 764 1590"> <tr> <td>Liquid temperature range:</td> <td>0 .. 40 °C</td> </tr> </table> <p data-bbox="296 1617 472 1646">Electrical data:</p> <table data-bbox="296 1646 813 1877"> <tr> <td>Mains frequency:</td> <td>50 Hz</td> </tr> <tr> <td>Rated voltage:</td> <td>1 x 220-240 V</td> </tr> <tr> <td>Rated current:</td> <td>0.98 A</td> </tr> <tr> <td>Capacitor size - run:</td> <td>4 µF/450 V</td> </tr> <tr> <td>Enclosure class (IEC 34-5):</td> <td>IP68</td> </tr> <tr> <td>Insulation class (IEC 85):</td> <td>B</td> </tr> <tr> <td>Length of cable:</td> <td>10M m</td> </tr> <tr> <td>Type of cable plug:</td> <td>AUS</td> </tr> </table> <p data-bbox="296 1904 384 1933">Others:</p> <table data-bbox="296 1933 761 2022"> <tr> <td>Net weight:</td> <td>4.35 kg</td> </tr> <tr> <td>Gross weight:</td> <td>5 kg</td> </tr> <tr> <td>Shipping volume:</td> <td>0.017 m³</td> </tr> </table>	Maximum particle size:	10 mm	Curve tolerance:	ISO 9906 Annex A	Pump housing:	PP 15 GF	Impeller:	PPOm 20 GF	Pump outlet:	G 1 1/4	Maximum installation depth:	10 m	Liquid temperature range:	0 .. 40 °C	Mains frequency:	50 Hz	Rated voltage:	1 x 220-240 V	Rated current:	0.98 A	Capacitor size - run:	4 µF/450 V	Enclosure class (IEC 34-5):	IP68	Insulation class (IEC 85):	B	Length of cable:	10M m	Type of cable plug:	AUS	Net weight:	4.35 kg	Gross weight:	5 kg	Shipping volume:	0.017 m ³	Price on request
Maximum particle size:	10 mm																																						
Curve tolerance:	ISO 9906 Annex A																																						
Pump housing:	PP 15 GF																																						
Impeller:	PPOm 20 GF																																						
Pump outlet:	G 1 1/4																																						
Maximum installation depth:	10 m																																						
Liquid temperature range:	0 .. 40 °C																																						
Mains frequency:	50 Hz																																						
Rated voltage:	1 x 220-240 V																																						
Rated current:	0.98 A																																						
Capacitor size - run:	4 µF/450 V																																						
Enclosure class (IEC 34-5):	IP68																																						
Insulation class (IEC 85):	B																																						
Length of cable:	10M m																																						
Type of cable plug:	AUS																																						
Net weight:	4.35 kg																																						
Gross weight:	5 kg																																						
Shipping volume:	0.017 m ³																																						


Description	Value
Product name:	Unilift CC 5
Product No:	96280972
EAN number:	5700830811900
Technical:	
Max flow:	6 m ³ /h
Head max:	5 m
Maximum particle size:	10 mm
Curve tolerance:	ISO 9906 Annex A
Materials:	
Pump housing:	PP 15 GF
Impeller:	PPOm 20 GF
Installation:	
Pump outlet:	G 1 1/4
Maximum installation depth:	10 m
Liquid:	
Liquid temperature range:	0 .. 40 °C
Electrical data:	
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	0.98 A
Capacitor size - run:	4 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Motor protec:	YES
Length of cable:	10M m
Type of cable plug:	AUS
Controls:	
Level switch:	float switch
Others:	
Net weight:	4.35 kg
Gross weight:	5 kg
Shipping volume:	0.017 m ³

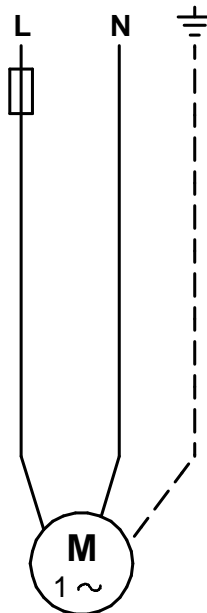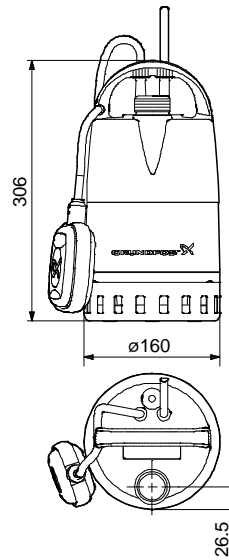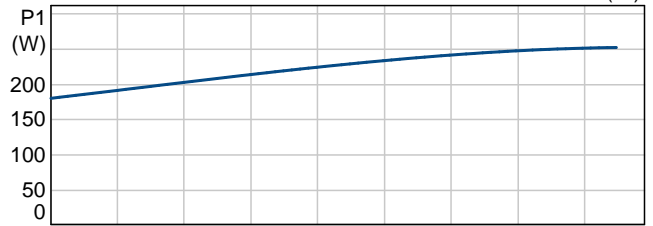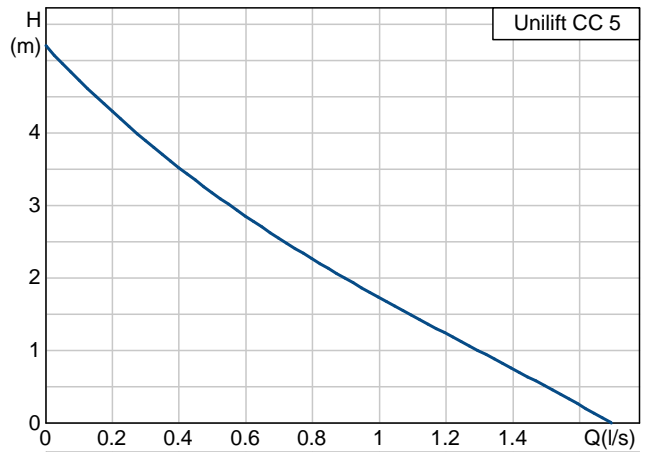


96280972 Unilift CC 5

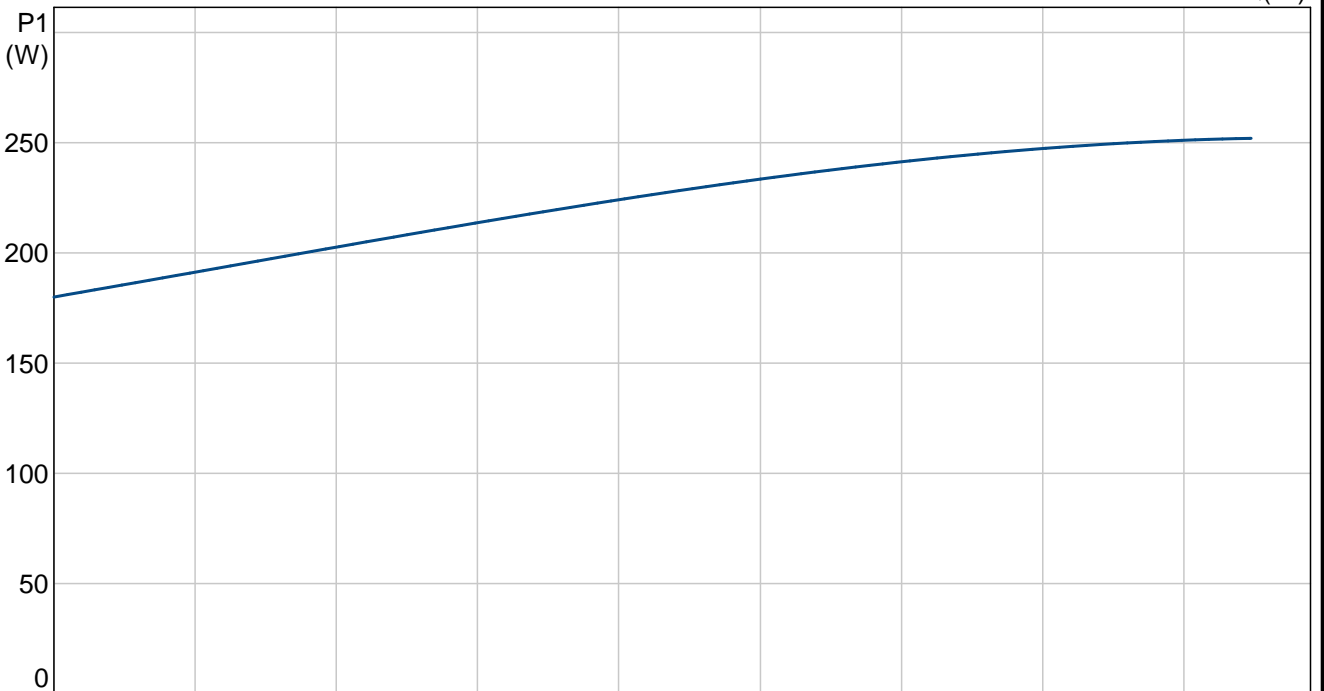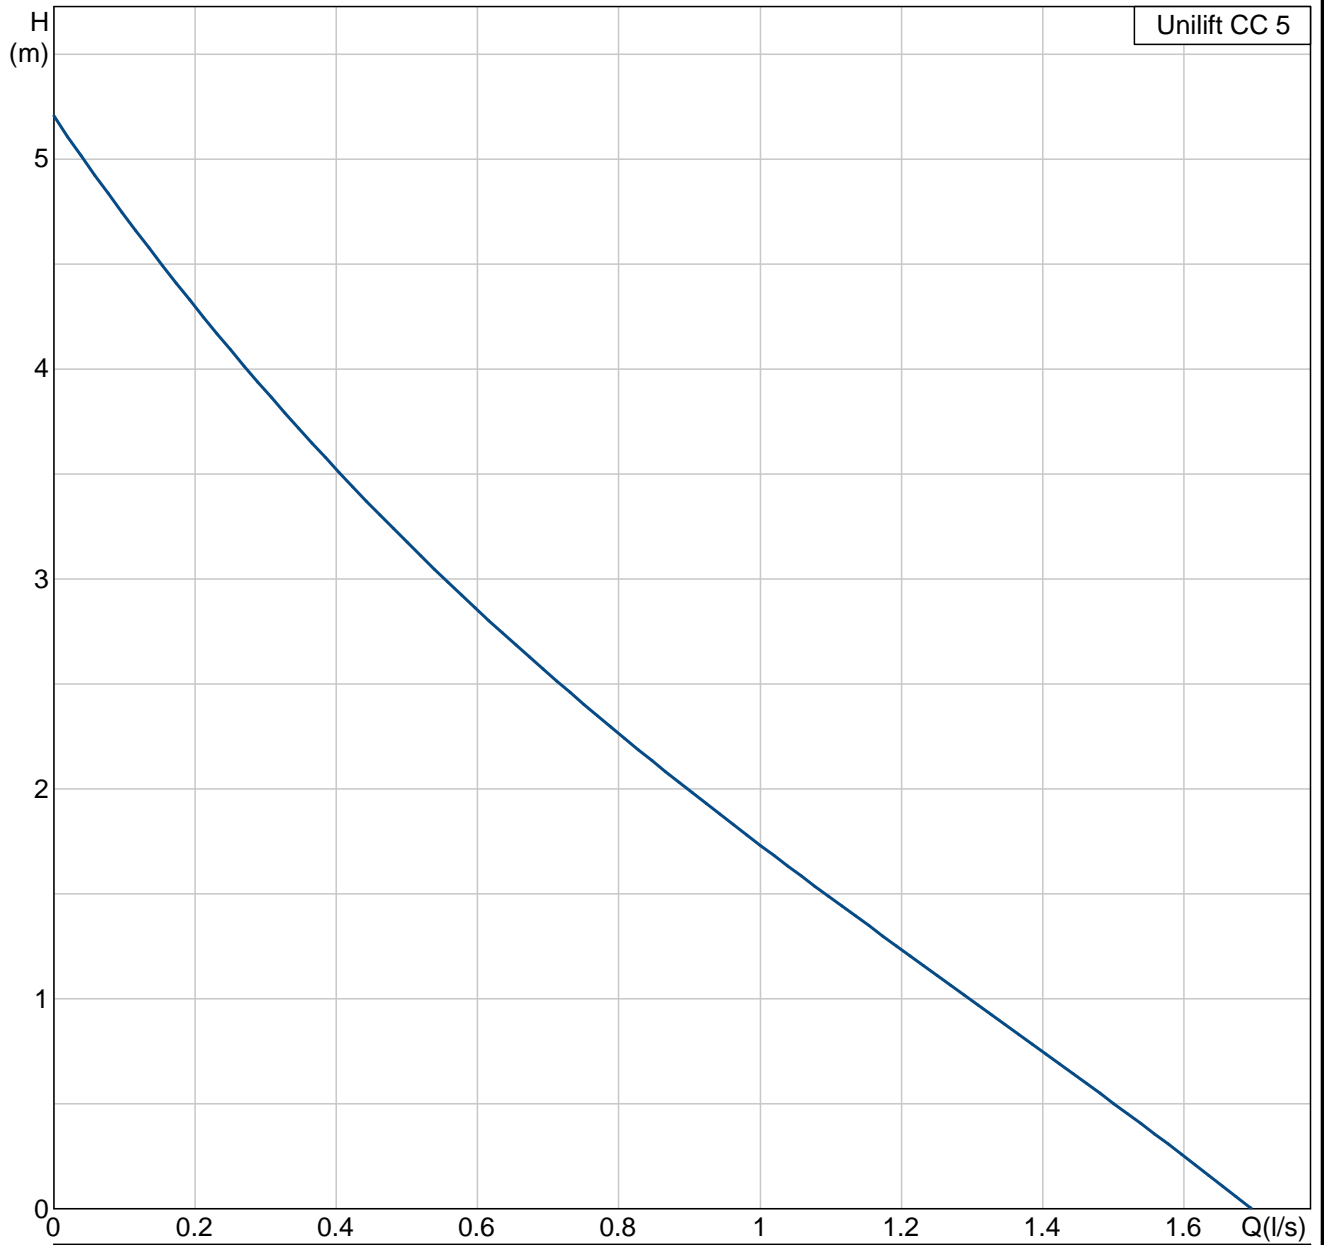

96280972 Unilift CC 5

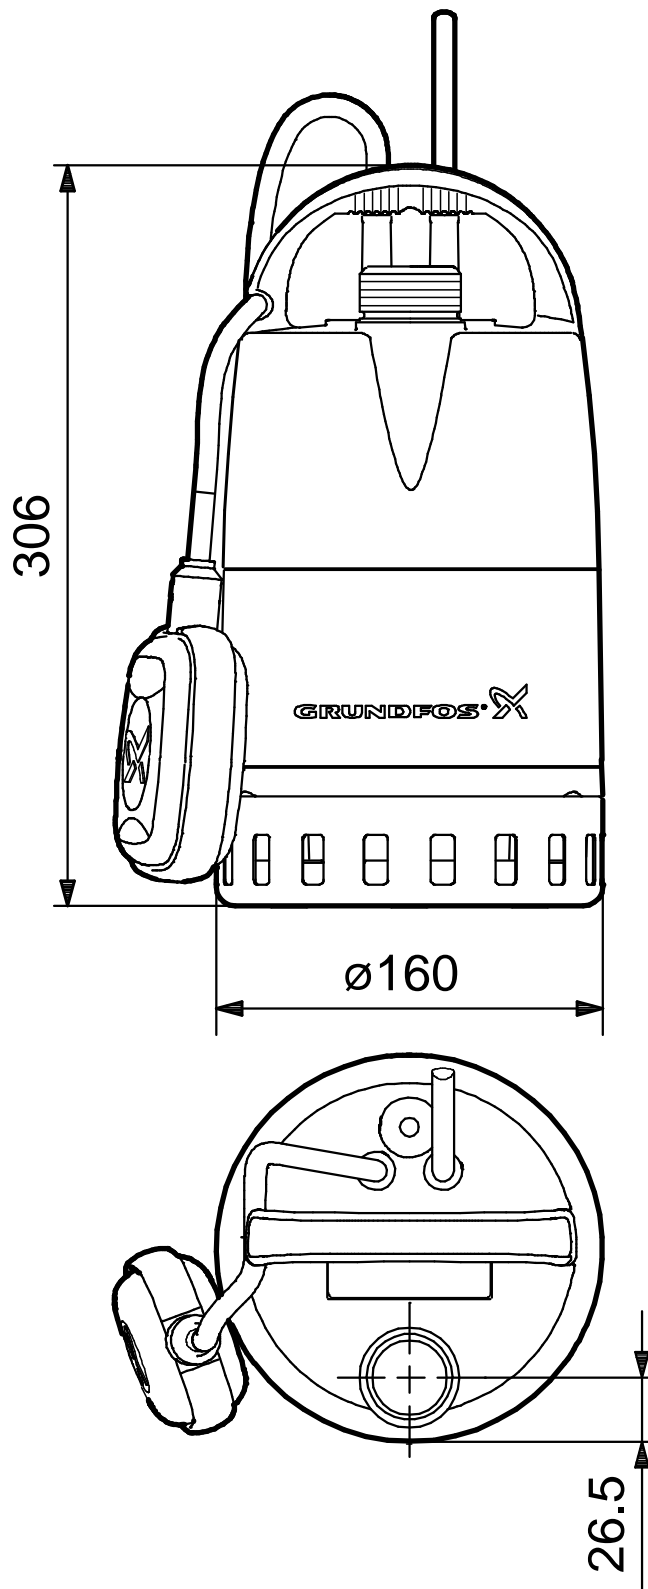

Note! All units are in [mm] unless others are stated.

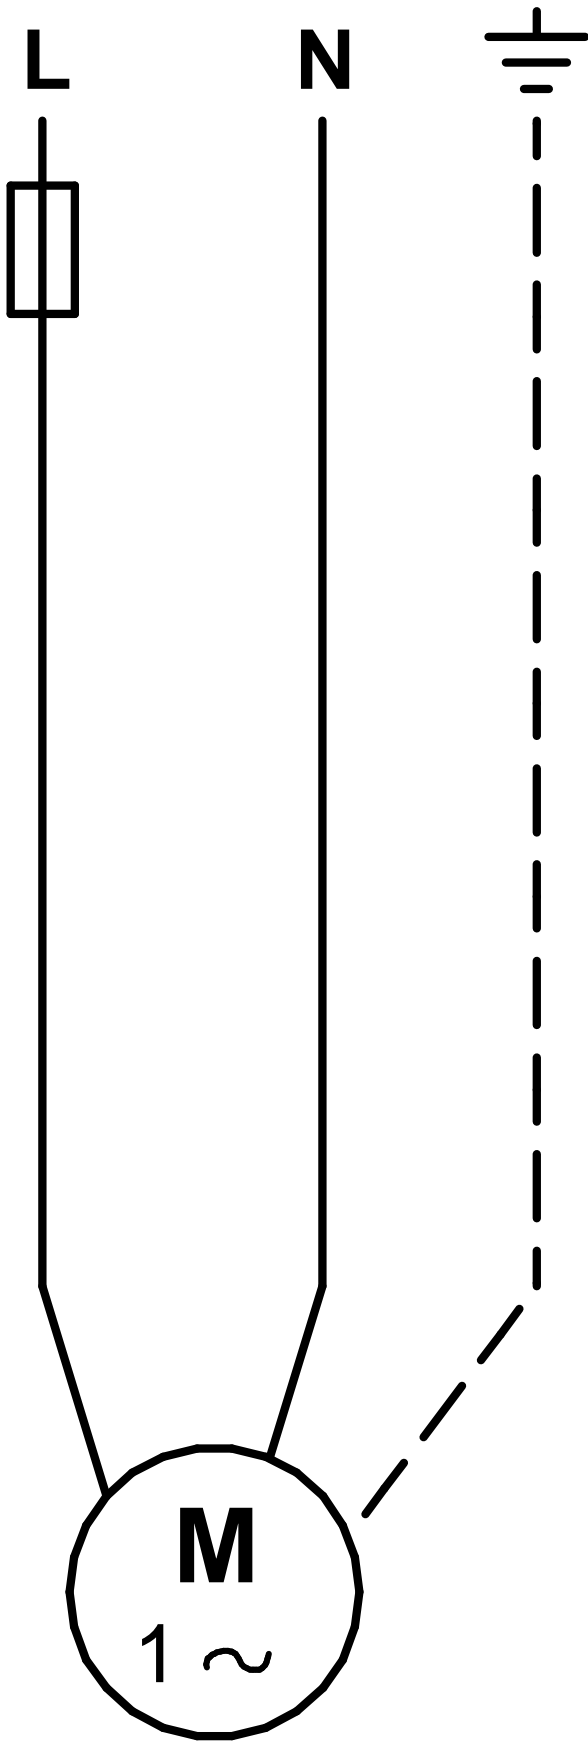

Note! All units are in [mm] unless others are stated.